

BATTERY SWITCH

MODEL: RS-BS275




FEATURES

- Unique ergonomic and aesthetic knob design
- Knobs removable for isolation / safety
- Robust Glass Fiber reinforced Nylon enclosure
- Removable windows for unobstructed wiring
- Surface or panel mount options provides flexibility when installing
- Meets ISO8846 Ignition Protection, suitable for installation in engine room



Specifications

Cranking Rating(10 Secs)	DC 1250A
Intermittent Rating (5 mins)	DC 455A
Continuous Rating	DC 275A
Voltage Rating	DC 48V
Terminal Studs	M10 (3/8")
Notes	CE ISO8846/SAE J1171 Ignition Protected


Schematic Diagram

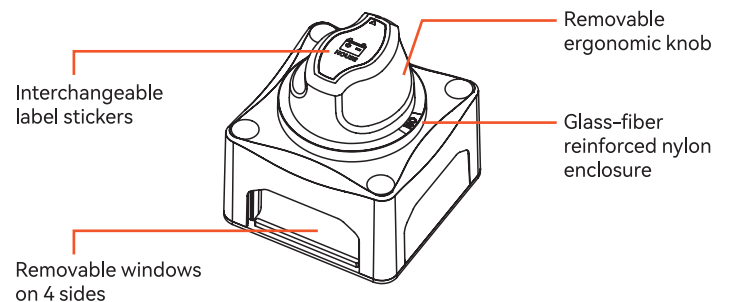

Label Stickers

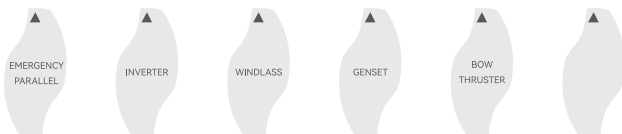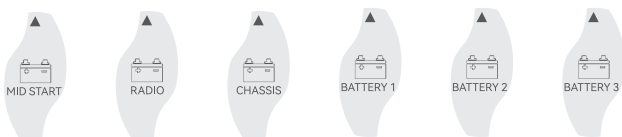

The Battery Switch is used to isolate the battery from a DC system.

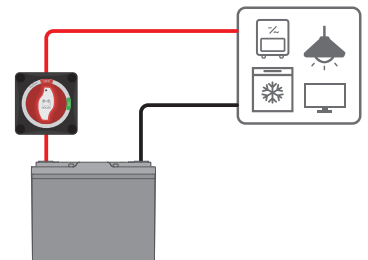

The Battery Switch is used as an emergency parallel switch.

